



Cord Operated Curtain Track Systems





Cord Operated Curtain Track System

Silent Gliss® 3840

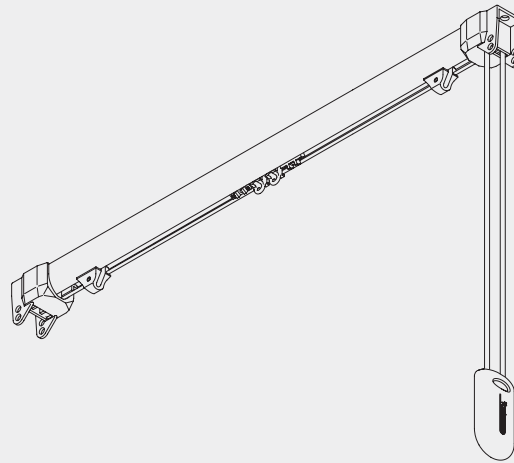


Product Information

- Purpose designed for ceiling fixing - neat, attractive track.
- Ideal for domestic or contract work.
- Also can be used as a room divider - same appearance from both sides.
- Super-efficient with roller gliders (system 3840R).
- For medium weight curtains.
- Standard length 6m. Can be joined.
- Standard colours: silver, white, gold, bronze, black.
- Can also be wall mounted.
- Standard cord drop 150cm, right-hand pull.
- Compatible with Wave Standard and Wave XL curtain heading systems.
- Can be bent.



3840

Profile, Bending and Specification Information



3841




Std. radius 200mm
Wave XL: Min. radius 500mm

Note: It is important to observe the minimum bending radius with Wave XL. The system will not function with a smaller radius.

Specification Guide- download from www.silentgliss.co.uk (password required).

Silent Gliss 3840 curtain track, cord drawn, anodised aluminium, assembled complete with gliders 6083 at 16/m. cord guide return set 3845, pilot runners 3842/3, overlap 6288 and cord 3090, (cord drop 150mm R.H.S.). Top fix with special fixing clamp 3825/bracket 3832 at max. 600mm centre each screwed to timber/plugged and screwed to block/concrete.Lm. Silent Gliss 3840R, as above except with 6283 roller gliders at 10/m.

How to measure

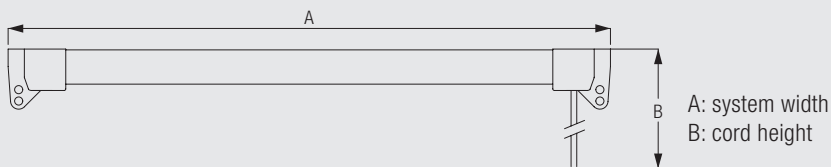

Stack depth Wave Standard




3840

Approximate stack depths when curtains fully opened:

- 60mm glider/100mm hook spacing: 100mm stack depth
- 60mm glider/120mm hook spacing: 120mm stack depth
- 80mm glider/140mm hook spacing: 140mm stack depth
- 80mm glider/160mm hook spacing: 160mm stack depth

Stack size calculation Wave XL



a = Stack depth 35cm
b = Stack size
c = Min. distance 22cm

| | | | | | | | | | | |
|--------------|---|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| System width | | 77-107 | 108-143 | 144-179 | 180-215 | 216-251 | 252-287 | 288-323 | 324-359 | 360-395 |
| | b | 28 | 33 | 38 | 43 | 48 | 53 | 58 | 63 | 68 |
| System width | | 396-431 | 432-468 | 469-503 | 504-539 | 540-575 | 576-600 | | | |
| | b | 73 | 78 | 83 | 88 | 93 | 98 | | | |
| System width | | 154-217 | 218-289 | 290-361 | 362-433 | 434-505 | 506-577 | 578-600 | | |
| | b | 28 | 33 | 38 | 43 | 48 | 53 | 58 | | |

(dimensions in cm)

System Dimensions



6m



14kg (roller glider)

Max. Curtain Weight Charts

Standard Application with Glider

| | 1 m | 2 m | 3 m | 4 m | 5 m | 6 m |
|--|-----|-----|-----|-----|-----|-----|
| | 9 | 9 | 8 | 8 | 7 | 7 |
| | 10 | 10 | 9 | 9 | 8 | 8 |
| | 7 | 7 | 6 | 6 | 5 | 5 |
| | 8 | 8 | 7 | 7 | 6 | 6 |
| | 4 | 4 | 3 | 3 | 2 | 2 |
| | 5 | 5 | 4 | 4 | 3 | 3 |
| | 3 | 3 | 2 | 2 | 1 | 1 |
| | 4 | 4 | 3 | 3 | 2 | 2 |

(kg max.)

Standard Application with Roller

| | 1 m | 2 m | 3 m | 4 m | 5 m | 6 m |
|--|-----|-----|-----|-----|-----|-----|
| | 12 | 12 | 11 | 11 | 10 | 10 |
| | 14 | 14 | 13 | 13 | 12 | 12 |
| | 9 | 9 | 8 | 8 | 7 | 7 |
| | 10 | 10 | 9 | 9 | 8 | 8 |
| | 6 | 6 | 5 | 5 | 4 | 4 |
| | 7 | 7 | 6 | 6 | 5 | 5 |
| | 5 | 5 | 4 | 4 | 3 | 3 |
| | 6 | 6 | 5 | 5 | 4 | 4 |

(kg max.)

Max. Curtain Weight Chart Wave / Wave XL

Option Wave / Wave XL

| | 2 m | 3 m | 4 m | 5 m | 6 m |
|--|-----|-----|-----|-----|-----|
| | 5 | 7.5 | 8 | 7 | 7 |
| | 5 | 7.5 | 8 | 8 | 8 |
| | 5 | 6 | 6 | 5 | 5 |
| | 5 | 6 | 6 | 6 | 6 |
| | 4 | 3 | 3 | 2 | 2 |
| | 4 | 4 | 4 | 3 | 3 |
| | 3 | 2 | 2 | 1 | 1 |
| | 3 | 3 | 3 | 2 | 2 |

(load limitation max. 2.5 kg per m)




3840

Straight tracks can be extended beyond 6m by using a connecting bridge and intermediate pulley.


System Options

Wave Standard curtain heading system



Wave is an exciting new contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m.

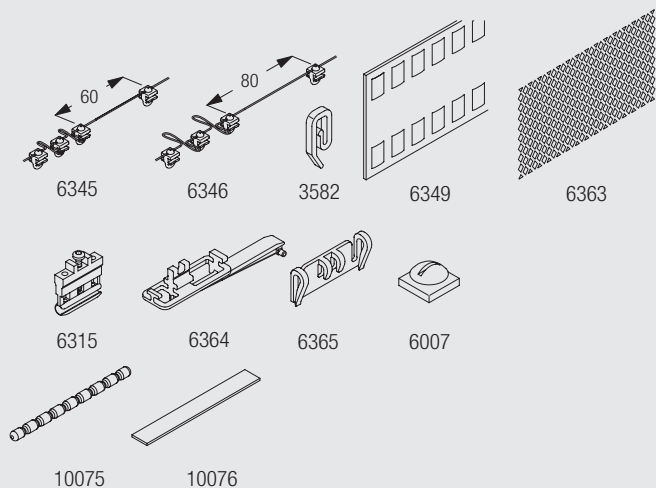

The Wave Standard components are:


- 6345 Glider cord 60mm
- 6346 Glider cord 80mm
- 3582 Hook
- 6349 Curtain tape
- 6363 Iron on top hemming tape
- 6007 End stop
- 6315 Pilot runner

Additional optional Wave components:


- 6364 Extension (for use with 6365)
- 6365 Hanger (for use with 6364)
- 10075 Lead weight for bottom hem 50gr/m
- 10076 Fabric weight for side of curtain

Wave XL curtain heading system

3840



Wave XL is especially designed for high and large application areas through generously designed waves with large cross section dimensions.

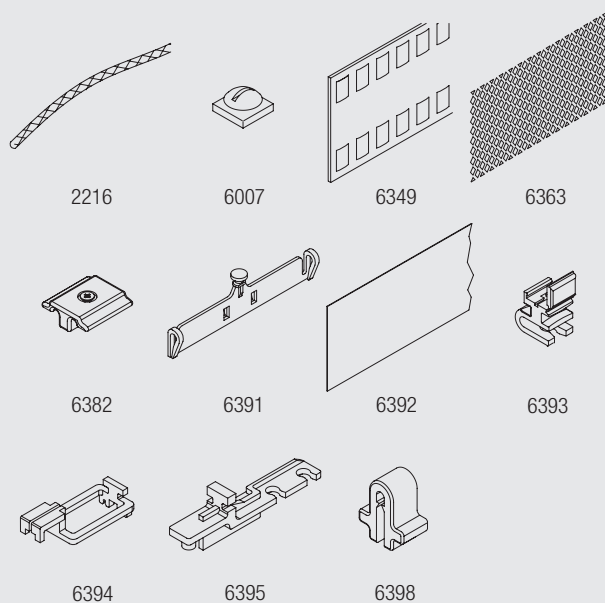


The Wave XL components are:

- 2216 Cord 0.85 mm
- 6007 End stop
- 6349 Curtain tape
- 6363 Iron tape
- 6382 Limit stop
- 6391 Hanger
- 6392 Heading film
- 6393 Glider
- 6394 Carrier
- 6395 Extension
- 6398 Clip


Fitting Information

Bracket and profile positioning

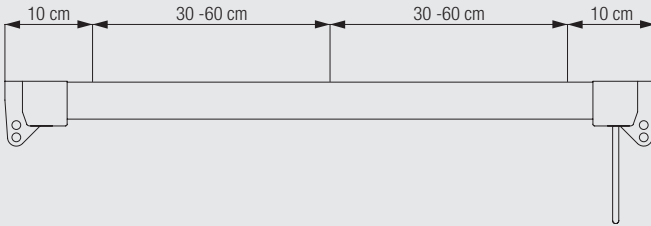


The measurements stated are offered as a guide only and will vary depending on curtain weight. For heavy curtains it is recommended that fixing points are 300mm max.

Fitting of clamp 3825

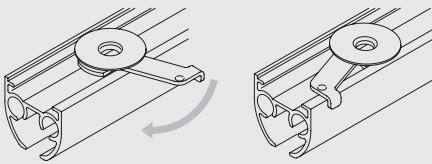

Higher edge of profile to the room side / clamp arm to the window.
Minimum clearance from back of profile is 17mm to allow for rotation.

Fitting of bracket 3832


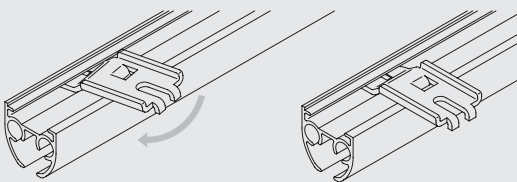


Fitting Options



3840



Ceiling fix with clamp 3825



The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Min. distance from wall when using Wave XL: 220 mm.



Ceiling fix with bracket 3832



The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Min. distance from wall when using Wave XL: 220 mm.


Ceiling fix with bracket 3826





The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Min. distance from wall when using Wave XL: 220 mm.

Wall fix with brackets 3134-39 and bracket 3826



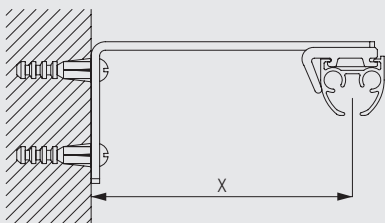


| | X (mm) | W (mm) | Y (mm) | Z (mm) |
|------|--------|--------|--------|--------|
| 3134 | 52 | - | 50 | - |
| 3135 | 72 | - | 50 | 50 |
| 3136 | 92 | - | 50 | 50 |
| 3137 | 112 | - | 80 | 50 |
| 3138 | 142 | 60 | 80 | 60 |
| 3139 | 192 | 85 | 80 | 85 |





Brackets feature thread for screw 6748 for fixing the bracket 3826

Wall fix with adjustable brackets 3275-77 and bracket 3826

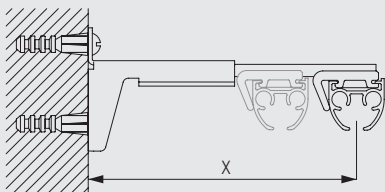









Brackets 3275-3277 are a combination of bracket support 3271 and bracket arm 3272, 3273 or 3274
Brackets are threaded for screw 6748 for fixing the bracket

Wall fix with bracket 3836



Standard Accessories

| | | | | | |
|-------|----------------------|---|------|---------------------------|---|
| 0998 | Safety Cord Retainer |  | 3090 | Cord (ø 3.5mm) |  |
| 3825 | Clamp (35mm) |  | 3841 | Profile |  |
| 6086 | Spring stop |  | 6096 | Glider 6083 in strip form |  |
| 6283 | Roller glider |  | 6288 | Overlap arm |  |
| 1148C | Countersunk screw | | | | |



Sets

| | | | | | | |
|------|----------------------------|--|------|--------------|---|---|
| 3845 | Cord guide set, containing | | 3804 | Cord guide | 2 |  |
| | | | 6314 | Pilot runner | 1 |  |
| | | | 6315 | Pilot runner | 1 |  |



3840

Optional Accessories

| | | | | | | |
|------|---------------------------|---|------|-------------------------------|--|---|
| 0516 | Pelmet spacer |  | 3133 | Bracket cover (60mm) | |  |
| 3134 | Extension bracket (60mm) |  | 3135 | Extension bracket (80mm) | |  |
| 3136 | Extension bracket (100mm) |  | 3137 | Extension bracket (120mm) | |  |
| 3138 | Extension bracket (150mm) |  | 3139 | Extension bracket (200mm) | |  |
| 3271 | Adjustable bracket base |  | 3272 | Adjustable bracket arm (69mm) | |  |

| | | | | | |
|------|--|--|-------|--|--|
| 3273 | Adjustable bracket arm (92mm) | | 3274 | Adjustable bracket arm (122mm) | |
| 3275 | Adjustable extension bracket set (69mm) | | 3276 | Adjustable extension bracket set (92mm) | |
| 3277 | Adjustable extension bracket set (122mm) | | 3340 | Cord/Chain weight (not for use with 4845 metal bead chain) | |
| 3735 | Cord tensioner with spring | | 3799 | Cord Tidy | |
| 3802 | Connecting bridge | | 3826 | Top fix bracket | |
| 3832 | Twist clamp | | 3833 | Intermediate pulley guide | |
| 3836 | Bracket (62mm) | | 6007 | Endstop | |
| 6053 | Spring stop | | 6063 | Metal overlap arm | |
| 6064 | Screw twist endstop | | 6094 | Roller glider with hook | |
| 6098 | Roller glider with eye | | 6315 | Pilot runner | |
| 6345 | Wave glider cord (60mm) | | 6346 | Wave glider cord (80mm) | |
| 6364 | Extension | | 6365 | Hanger | |
| 6382 | Limit stop | | 6391 | Hanger | |
| 6392 | Heading film | | 6393 | Glider | |
| 6394 | Carrier | | 6395 | Extension | |
| 6398 | Clip | | 3133L | Extended bracket cover for 3138/9 | |

3840

Sets

| | | | | | | |
|------|--|--|------|-------------------|---|--|
| 3846 | Cord guide set with return, containing | | 3816 | Corner cord guide | 2 | |
| | | | 6314 | Pilot runner | 1 | |
| | | | 6315 | Pilot runner | 1 | |

Sewing Information and Accessories




Diagram uses standard gliders (6083, 6283) measured to the inside of the glider eye. For optional roller gliders substitute dimensions below:

6094 = 31mm

6098 = 26mm

3562 Standard tape



3599 Hook



6363 Top hemming tape



10076 Fabric weight




3582 Hook



6349 Wave curtain heading tape



10075 Lead weight 50 gr/m



3840

www.silentgliss.co.uk

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: 0044 (0) 1843 863571
Fax: 0044 (0) 1843 864503
sales@silentgliss.co.uk