

Silent Gliss®

3840 Cord Operated & 3840HD Hand Operated Curtain Track Fitting Instructions

WARNING Parents should realise that children could accidentally strangle in window blind cords. Keep the cords out of the reach of children using one of these devices.



1. Clothes peg
or bulldog
clip



2. Cleat




3. Tie cord
to itself




4. Cord tidy
(Silent Gliss
part No. 3799)



System 3840 is designed as a top fix track using special clamp 3825 screwed into timber. When fixing to brickwork or concrete, drilled holes should be plugged. The system can be face fixed by using the 3825 clamp in conjunction with fixed extension brackets 3134-3138 or adjustable extension brackets 3275-3277. In all cases the recommended spacing of clamps should be observed.




1 Mark off position
of clamps.




There should be at least 15mm clearance between the back edge of the profile and the wall to enable the clamps to operate properly.

2 A minimum distance of 30mm from the wall to drill hole should be allowed for. However, when positioning the clamps you should also bear in mind the fullness of the fabric of the curtain to be hung. A distance of 8.5cm should be sufficient for most curtains. Use a chalk line or similar method to ensure correct alignment. A clamp should also be positioned 10cm from each end of the system to provide extra stability.

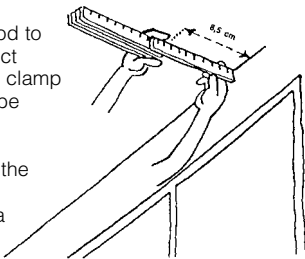


Wall fix

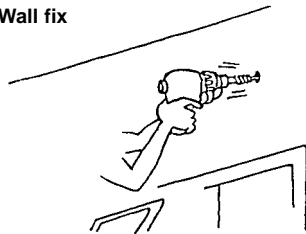

3a


Then drill and plug holes at 30-60cm intervals.

Ceiling fix

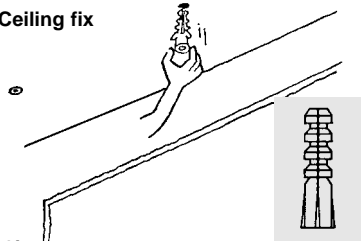

3b

Wall fix

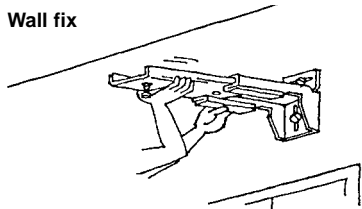


4a


Screw brackets and clamps into position.

Ceiling fix

4b

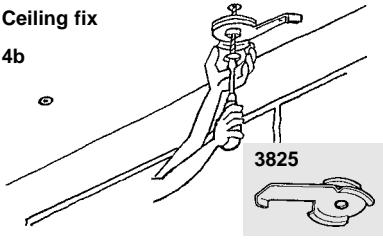

Wall fix

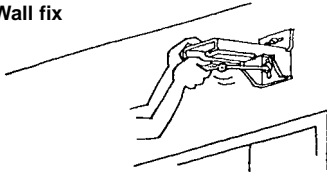


5a


When all the clamps have been screwed into position, rotate them so that the lever part is pointing towards the wall as shown in the diagram.

Ceiling fix

5b

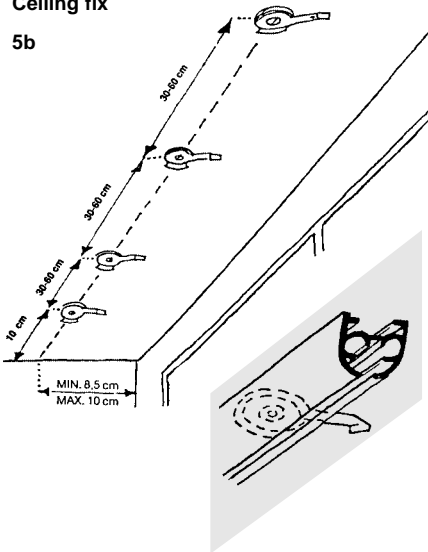


Wall fix

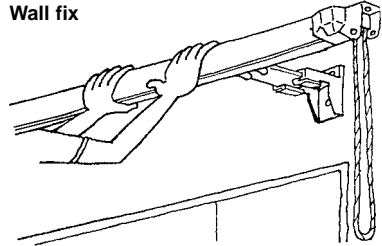

6a

Offer the track to the clamps. Either by hand or gently with a hammer, rotate the clamps to secure the track in position.

Ceiling fix

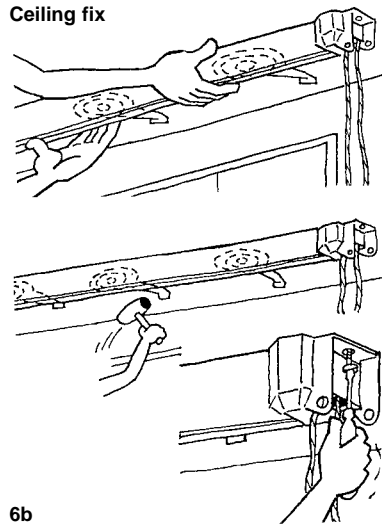

6b

Silent Gliss Limited

Star Lane, Margate, Kent CT9 4EF, England
Telephone: 01843 863571 Fax: 01843 864503
E-mail: info@silentgliss.co.uk www.silentgliss.co.uk